



	0004	2000	0000	2000							
	<u>206A</u>	, <u>206B</u>	<u>206C</u>	<u>206D</u>							
	USER	USER	USER	USER							
	<u>205A</u> HIGH-LEVEL	<u>205B</u> HIGH-LEVEL	<u>205C</u> HIGH-LEVEL	<u>205D</u> HIGH-LEVEL							
210	0\$	0\$	0\$	0S							
	204A USER/ HYPVSR I/F	<u>204B</u>	<u>204C</u>	<u>204D</u>							
	OS KERNEL	OS KERNEL	OS KERNEL	OS KERNEL							
	HYPER 203 VISOR MGMT										
	BASE HYPERVISOR (PLIC)										
	<u>201</u>										
	HARDWARE LEVEL										
'											

FIG. 2



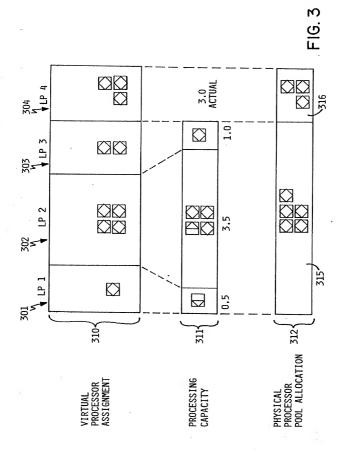

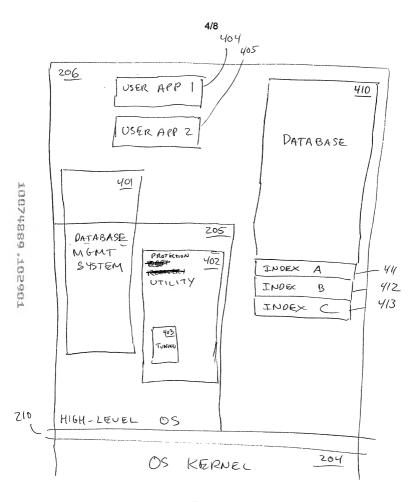

F16.4

	515	Z Z	Γ.	Max	j				
And the second s	MS 818	EXP EXP		CAVI RPUZ					\S \(\begin{array}{c}
	7 N			1	\$	• •		AN THE REAL PROPERTY OF THE PR	<u>U</u>
	515 215	GRP CRP		Sec GRP GRP /			N-S-A-S-A-S-A-S-A-S-A-S-A-S-A-S-A-S-A-S-	THE PARTY OF THE P	
		501 65 80		502 / < 12 Sec			503 ALWAYS		

